




★ ★ ★ ★ ★  
★ ★ ★ ★ ★ EUROPEAN QUALITY  
★ ★ ★ ★ ★

### Quality

- / IP67 + 1 m cable
- / Subjected to test electroluminescence
- / Friendly environment & recyclable materials
- / High transmissivity glass and high resistance
- / Frame with higher mechanical strength and air chamber

### Certificates

- / IEC 61215:2005
- / IEC 61730-1:2004 / IEC 61730-2:2004
- / Frontal load (snow) 5.400 Pa
- / Back load (wind) 2.400 Pa
- / Fire Resistance Certificate
- / Class I (under standard UNI 9177)
- / EE016-20130528-001 (France)
- / WEEE compliance in Germany
- / ETL Listed Mark (USA-Canada)
- / MCS (UK)

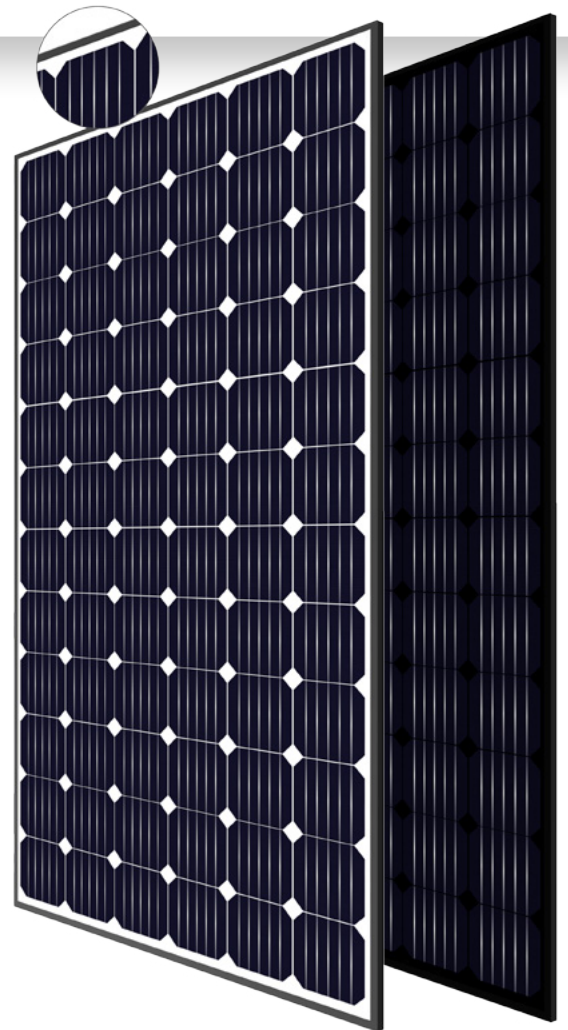

**TOTAL 60**  
+ 15 YEARS WARRANTY  
+ 20 YEARS EXPERIENCE  
+ 25 YEARS PERFORMANCE

+3%

Extra power  
extra up to 3%  
extra up to 7W

PHOTON Laboratory talks about our modules:

*"Eurener is one of the oldest module manufacturers in Europe: the Spanish company was founded in 1997. [...] Is distinguished by having values that are over the average: the temperature coefficient is quite better than other modules that are in the test field. The curve behavior at different irradiance conditions shows a marked efficiency increase in radiations from medium to high, and a slight drop in efficiency at low irradiance conditions. These factors show that this module could reach higher performance than the average in long-term measurements".*



# TURBO PLUS

Standard - All Black / 350 / 355 / 360 / 365 / 370 / 375 W



25 years performance warranty  
15 years product warranty





### Technical features

Frame
Black / Silver anodized aluminium 0,015 mm
Covered cell interconnections
Robust and resistant to corrosion
Built-in plug
Connection box
Sealed, robust and wide for heat dissipation
IP67 according to IEC 60529
Diodes by-pass built-in (6) for protection of the partial shading
Connector MC4 or compatible, easy and rapid connection
Cables 1.25 meter length and 4mm <sup>2</sup> section
Reaction to Fire Class I (conformity to UNI 9177 norm)
Frontal
3,2 mm tempered glass
Textured, extra-clear with low iron content
Solar cells
72 cells monocrystalline silicon / 156x156 mm
Weight and dimensions (L x W) +/-1% mm
24 Kg   1957 x 992 x 40/50 mm

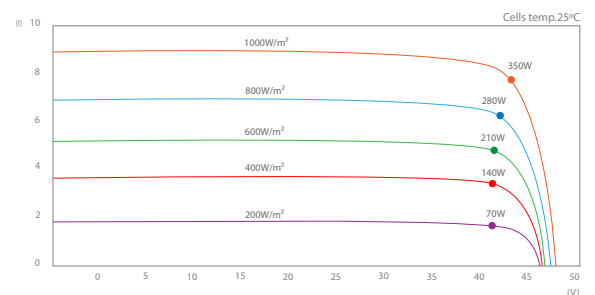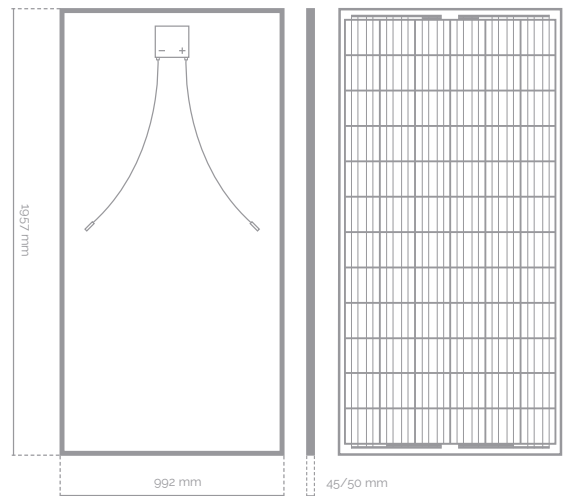

### Electric data

Standard - All Black	MEPV 350	MEPV 355	MEPV 360	MEPV 365	MEPV 370	MEPV 375
Nominal power, P <sub>mpp</sub>	350 W	355W	360 W	365 W	370W	375W
Tolerance, P <sub>mpp</sub>	0 / +3%	0 / +3%	0 / +3%	0 / +3%	0 / +3%	±1%
Area of the module	1,94					
Module efficiency	18,04%	18,30%	18,56 %	18,81%	19,07%	19,33%
I <sub>sc</sub>	9,60 A	9,64 A	9,70 A	9,74 A	9,80 A	9,85 A
U <sub>oc</sub>	47,10 V	47,50 V	47,60 V	48,00 V	48,30 V	48,70 V
I <sub>mpp</sub>	9,04 A	9,15 A	9,23 A	9,31 A	9,39 A	9,47 A
U <sub>mpp</sub>	38,70 V	38,80 V	39,00 V	39,20 V	39,40 V	39,60 V
Maximum voltage	1000 V					
α I <sub>sc</sub>	0,042% / °C					
β U <sub>oc</sub>	- 0,20% / °C					
γ P <sub>max</sub>	- 0,40% / °C					
Temperature range	- 40°C to +85°C					
NOCT	48°C ± 2°C					

NOTE: Read the instruction manual of this product and follow the indications. Values are valid for 1000W/m<sup>2</sup>, AM 1.5 and cell's temperature of 25°C. All the information of this brochure may be amended without notice by Eurener.

Sales Office:  
Av. Marqués de Sotelo, 1-4<sup>a</sup>  
46002 Valencia (Spain)

Tel. +34 96 004 55 15  
contact@eurenerworld.com

